


E: 71502.0282(m)

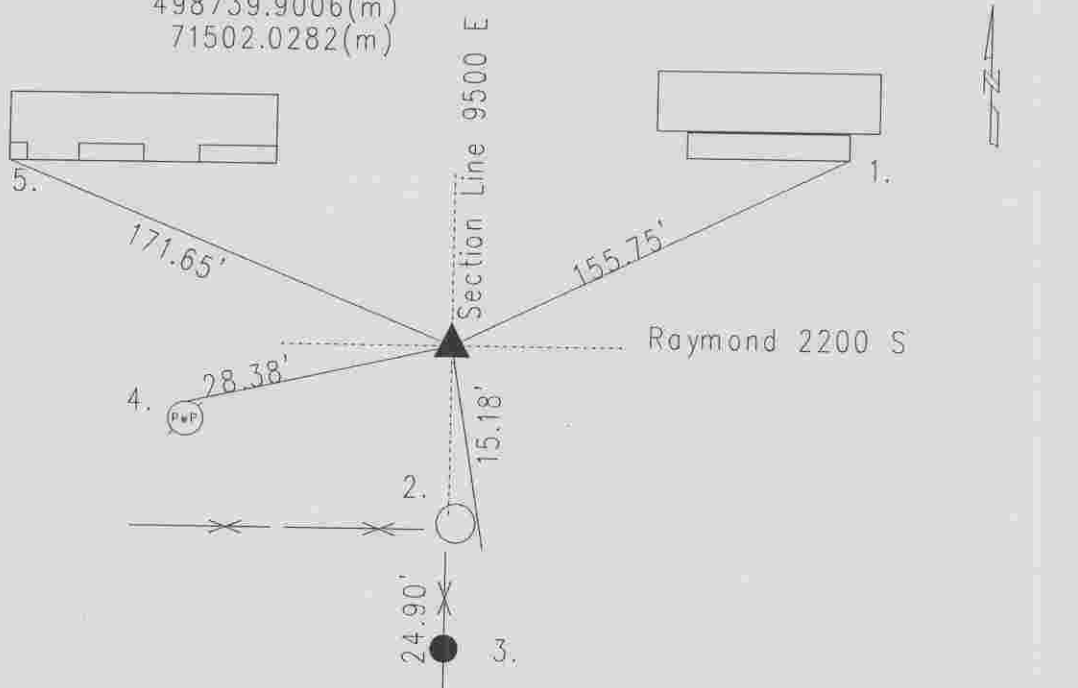

Original post set 1820 by Hendricks with witness: 5" white beech N 11 E 2 links; 7" beech S 2 W 30 links per Marion County Atlas pg. 14. Hosbrook 4-16&17-1855 called stone with witness: 5" beech N 80 W 11 links, 14" beech N 49 1/2 E 40 links per Warren Township Legal Survey Book pg. 35. Miller 4-30-48 called old stake replaced w/stone w/cross 12" down. Burres 11-30-54 called same. Fortner 1-31-75 called PK nail. Whiteside 4-6-93 called railroad spike. Wilcoxen 5-19-94 excavated railroad spike found 4" down. Stone found 13 1/2" down w/guard pipe next to it. Stone measured 15"x12"x8". Harrison set. Re-tied 4-29-00. Re-tied 6-28-05 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	155.75'	SF corner of porch ADDRESS 9521
2.	15.18'	PK nail F corner fence post 3"up
3.	24.90'	2" pipe found in fence row
4.	28.38'	PK nail N PwP#26-621 A 3"up
5.	171.65'	SW corner of bldg. ADDRESS 9450